


Однорядные роликовые цепи (B серии)-Single roller chains (B series)

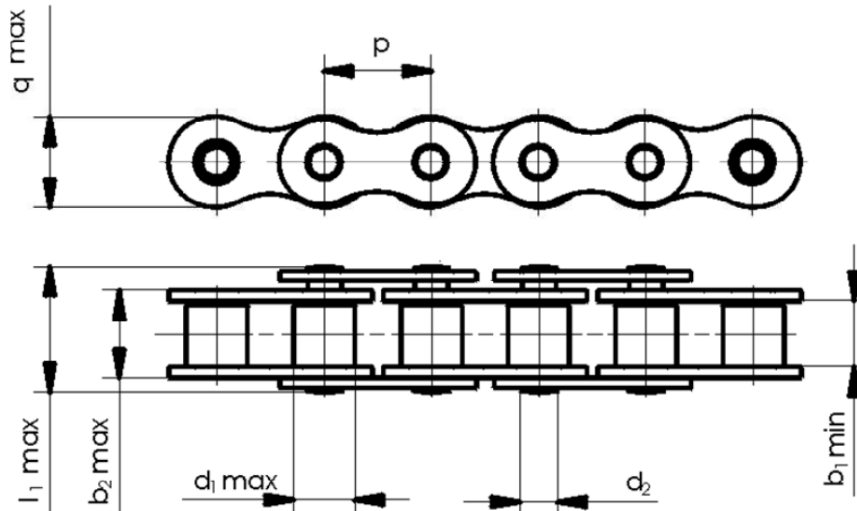

ISO 606-2004
DIN 8187-1

ISO	p	$pxbl$	$b1$	$b2$	$d2$	$d1$	$l1$	q	Breaking Load
	mm	inch	mm	mm	mm	mm	mm	mm	N
05B-1	8	8x3 mm	3	4.77	2.31	5	8.6	7.1	5000
06B-1*	9.525	$3/8 \times 7/32$	5.72	8.53	3.28	6.35	13	8.2	9000
081	12.7	$1/2 \times 1/8$	3.3	5.8	3.66	7.75	9.8	9.4	9400
083	12.7	$1/2 \times 3/16$	4.88	7.9	4.09	7.75	12.6	10.2	11600
084	12.7	$1/2 \times 3/16$	4.88	8.8	4.09	7.75	14.7	10.2	15600
085	12.7	$1/2 \times 1/4$	6.38	9.07	3.58	7.77	13.3	9.4	6700
08B-1	12.7	$1/2 \times 5/16$	7.85	11.3	4.45	8.51	16.4	11.8	18200
10B-1	15.875	$5/8 \times 3/8$	9.65	13.28	5.08	10.16	18.8	14.73	23000
12B-1	19.05	$3/4 \times 7/16$	11.68	15.62	5.72	12.07	21.8	16.1	28900
12B-1 H12	19.05	$3/4 \times 7/16$	11.67	17.23	6.1	12.07	25.9	18	40000
16B-1	25.4	1"x17.02 mm	17.02	25.45	8.28	15.88	35	20.3	60000
20B-1	31.75	$1 \frac{1}{4} \times 3/4$	19.56	29.01	10.19	19.05	40.4	26	95000
24B-1	38.1	$3/2 \times 1"$	25.4	37.4	14.63	25.4	53.4	33.2	160000