


Двухрядные роликовые цепи (B серии)-Double roller chains (B series)

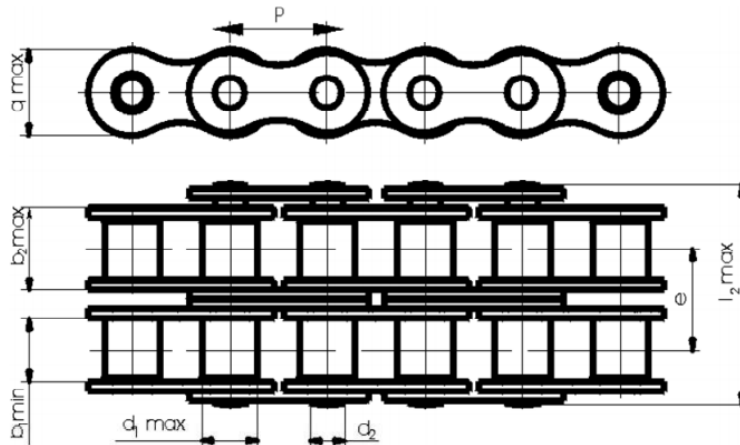

ISO 606-2004
DIN 8187-1

| ISO | <i>p</i> | <i>p</i> \times <i>b1</i> | <i>b1</i> | <i>b2</i> | <i>d2</i> | <i>d1</i> | <i>l2</i> | <i>q</i> | <i>e</i> | Breaking Load N |
|-------|----------|-----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|----------|--------------------|
| | mm | inch | mm | mm | mm | mm | mm | mm | | |
| 08B-2 | 12.7 | $1/2 \times 5/16$ | 7.75 | 11.3 | 4.45 | 8.51 | 30.4 | 11.8 | 13.92 | 32000 |
| 10B-2 | 15.875 | $5/8 \times 3/8$ | 9.65 | 13.28 | 5.08 | 10.16 | 35.8 | 14.7 3 | 16.59 | 45400 |
| 12B-2 | 19.05 | $3/4 \times 7/16$ | 11.68 | 15.62 | 5.72 | 12.07 | 41.7 | 16.1 | 19.46 | 57800 |
| 16B-2 | 25.4 | 1" \times 17.02 mm | 17.02 | 25.45 | 8.28 | 15.88 | 67.3 | 20.3 | 31.88 | 106000 |
| 20B-2 | 31.75 | $1 1/4 \times 3/4$ | 19.56 | 29.01 | 10.19 | 19.05 | 76.9 | 26 | 36.45 | 170000 |