



Цепи с полым валиком - Hollow pin chains

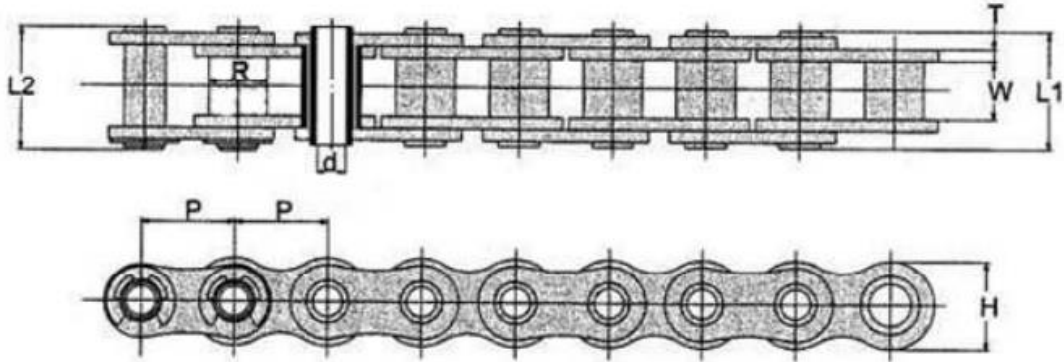

Bushing chains

Description	p	W	R	d	$L1$	$L2$	T	H	Breaking load N
	mm	mm	mm	mm	mm	mm	mm	mm	
08BHP	12.7	7.75	8.51	4.5	16.5	17.4	1.6	11.8	12000
40HP	12.7	7.75	7.94	4.1	16.6	17.5	1.5	12	12700
50HP	15.875	9.53	10.16	5.1	20.5	21.8	2	15	20300
60HP	19.05	12.7	11.92	6.1	25.8	27	2.4	18.3	26500
80HP	25.4	15.88	15.88	8.2	32.4	35.5	3.2	24.1	51000

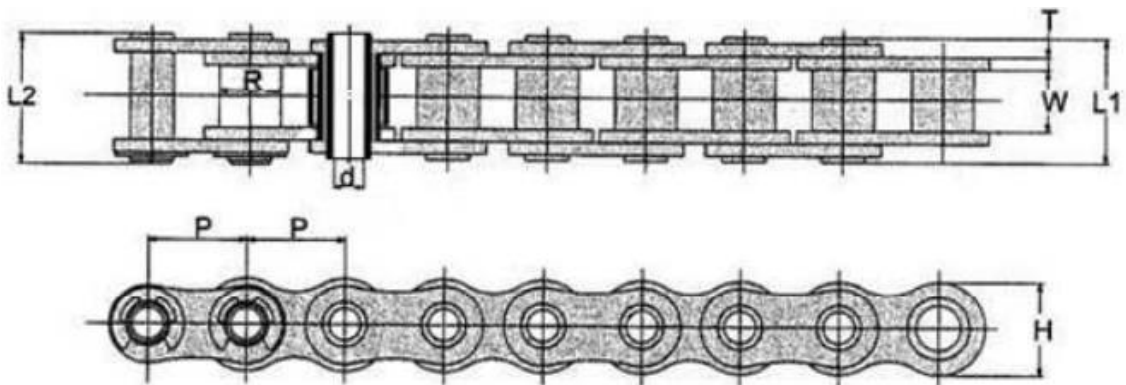

Roller chains

Description	p	W	R	d	$L1$	$L2$	T	H	Breaking load N
	mm	mm	mm	mm	mm	mm	mm	mm	
10BHB	15.875	9.65	10.16	4.1	19.4	20.5	1.7	14.7	20000
12BHP	19.05	11.7	12.07	4.1	21.5	22.7	1.85	16	23000
60HB	19.05	12.7	11.92	5.1	25.6	26.7	2.4	18	22000