


## Трехрядные роликовые цепи (B серии)-Triple roller chains (B series)

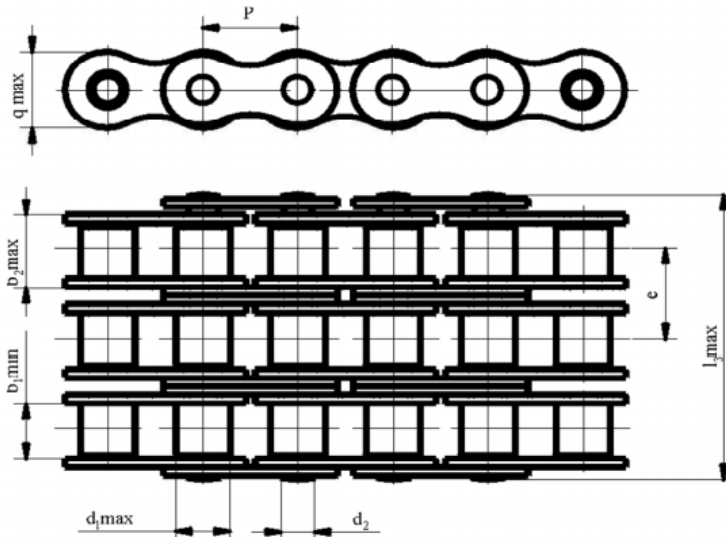

ISO 606-2004  
DIN 8187-1

| ISO   | $p$    | $p \times b_1$     | $b_1$ | $b_2$ | $d_2$ | $d_1$ | $l_3$ | $q$   | $e$   | Breaking Load<br>N |
|-------|--------|--------------------|-------|-------|-------|-------|-------|-------|-------|--------------------|
|       | mm     | inch               | mm    | mm    | mm    | mm    | mm    | mm    |       |                    |
| 08B-3 | 12.7   | $1/2 \times 5/16$  | 7.75  | 11.3  | 4.45  | 8.51  | 44.5  | 11.8  | 13.92 | 45400              |
| 10B-3 | 15.875 | $5/8 \times 3/8$   | 9.65  | 13.28 | 5.08  | 10.16 | 52.4  | 14.73 | 16.59 | 68100              |
| 12B-3 | 19.05  | $3/4 \times 7/16$  | 11.68 | 15.62 | 5.72  | 12.07 | 61.3  | 16.1  | 19.46 | 86700              |
| 16B-3 | 25.4   | 1" x 17.02 mm      | 17.02 | 25.45 | 8.28  | 15.88 | 99    | 20.3  | 31.88 | 160000             |
| 20B-3 | 31.75  | $1 1/4 \times 3/4$ | 19.56 | 29.01 | 10.19 | 19.05 | 113.4 | 26    | 36.45 | 250000             |